PRODUCT SPEC SHEET

TITAN 22 PERFORMANCE DRILLING MOTOR - 7" 5/6 10.8

Scientific Drilling's Titan 22 performance drilling motor is designed for the most extreme drilling environments in the industry. It has been engineered to run with the highest torque power sections, delivering ultimate reliability and durability in all sections of the well.

The Titan 22 also features a unique Ti-Flex™ Titanium Flex Shaft and bearing pack assembly to deliver optimal performance in a wide range of applications.

DELIVERING THE ULTIMATE VALUE

- Enhanced WOB capacity supporting increased and consistent ROP for superior drilling performance
- Rugged driveline design for ultra-high power torque sections delivering maximized reliability
- Full rotational capabilities in all sections of the well ensuring optimal wellbore integrity
- Innovative Ti-Flex[™] Titanium Flex Shaft and bearing assembly, for increased durability and extended tool life

TARGET APPLICATIONS

- Performance Drilling
- Extended Reach Laterals
- Factory Drilling in Shale Reservoirs
- One Run Applications
- Laminated Formations



GENERAL SPECIFICATIONS	
Length	38.6 ft (11.76 m)
OD	7.15 in (181 mm)
Recommended Hole Sizes	8 ¹ / ₂ - 9 ⁷ / ₈ in (215 - 250 mm)
Max Bend Angle	2.12°
BEARING SECTION	
Bit to Bend Length	52 in (1.3 m)
Bit Box Connection	4½ in API Reg. Box
Max WOB	60,000 lbs (26,689 DaN)
Max Overpull for Rerun	110,000 lbs (48,930 DaN)
Overpull to Yield Motor	240,000 lbs (106,757 DaN)
Max Bit Pressure Drop	1,000 psi (6,894 kPA)
Opt. Bit Pressure Drop	100 - 750 psi (690 - 5,171 kPA)
LCM Capability	40 lb nut plug
POWER SECTION	
Lobe Configuration	5/6
Stages	10.8
Max Diff Pressure	2,430 psi (16,750 kPa)
Stall Diff Pressure	3,650 psi (25,130 kPa)
Torque at Max Diff Pressure	14,070 ft-lbs (19,080 Nm)
Stall Torque	21,110 ft-lbs (28,620 Nm)
Flow Range	300-750 gal/min (1,140 - 2,840 L/min)

Specifications are subject to change without notice.

Speed Range

Speed Ratio

Torque Slope

Updated Nov 2016
Copyright © 2016 Scientific Drilling International

135 - 340 RPM

0.450 rev/gal (0.119 rev/L)


5.792 ft-lb/psi (1.139 Nm/kPa)





TITAN 22 PERFORMANCE DRILLING MOTOR - 7" 5/6 10.8

Titan 22 7" 5/6 10.8 Power Curve

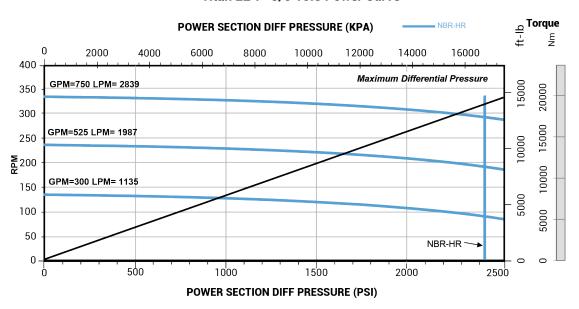

Updated Nov 2016
Copyright © 2016 Scientific Drilling International

